

12G-SDI Video CWDM SFP+ 20km Optical Transceiver Modules

FST-12G-xxC20

Features

- SD/HD/3G/6G/12G-SDI SFP Transceiver
- ST 259, ST 292-1, ST 424, ST-2081 and ST-2082 compatible
- Metal enclosure for Lower EMI
- DFB laser transmitter
- Supports SDI pathological patterns for SD-SDI, HD-SDI, 3G-SDI, 6G-SDI and 12G SDI
- Compliant with SFP MSA
- Duplex LC connector
- The module's receiver contains reclocker
- ROHS compliant(lead free)
- single 3.3V power supply
- Hot-pluggable SFP footprint
- Operating case temperature range: 0 to +70°C




Applications

- ST 259, ST 292-1, ST 424, ST-2081 and ST-2082 Electrical-to-Optical Interfaces
- UHDTV/HDTV/SDTV Service Interfaces

Description

FiberStamp's Video transceiver is designed to transmit/receive data rates from 50Mbps to 11.88Gbps, compliant with SMPTE ST 2082-1 (12G UHD-SDI), ST 2081-1 (6G UHD-SDI), ST424 (3G SDI), ST 292-1 (HD-SDI), and ST 259 (SD-SDI). FiberStamp's Video transceiver supports SDI pathological patterns signals. The transceiver includes these sections: a DFB laser, a PIN photodiode integrated with a trans-impedance preamplifier (TIA), Reclocker, and a MCU controller. The transceiver is compliant with SFP Multi-Source Agreement (MSA).

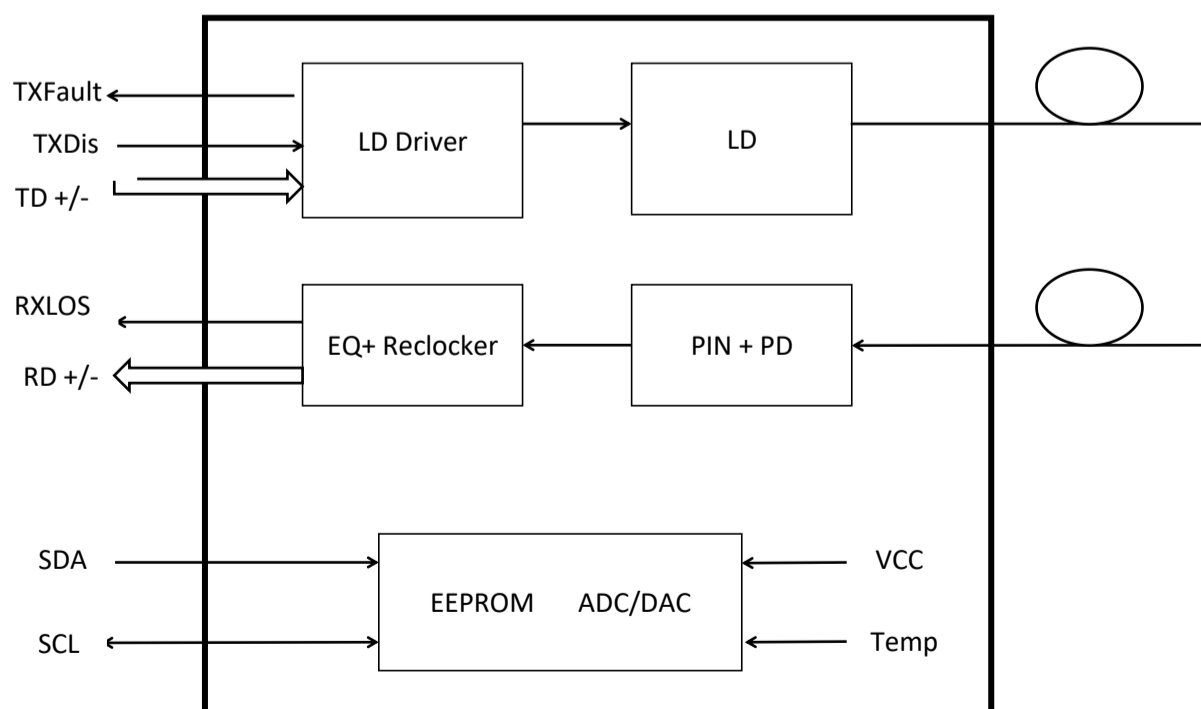

Absolute Maximum Ratings

Parameter	Symbol	Min	Max	Unit
Supply Voltage	Vcc	-0.5	4	V
Storage Temperature	Ts	-40	+85	°C
Operating Humidity	-	5	85	%

Recommended Operating Conditions

Parameter	Symbol	Min	Typical	Max	Unit
Operating Case Temperature	Tc	0		+70	°C
Power Supply Voltage	Vcc	3.13	3.3	3.47	V
Power Supply Current	Icc		300	450	mA
Data Rate			12		Gbps

Optical and Electrical Characteristics

Parameter	Symbol	Min	Typical	Max	Unit	Notes	
Transmitter							
Spectral Width (-20dB)	σ			1	nm		
Side Mode Suppression Ratio	SMSR	30			dB		
Average Output Power	Pout	-3		1	dBm	1	
Extinction Ratio	ER	3.5			dB		
Data Input Swing Differential	VIN	400		1000	mV	2	
Input Differential Impedance	ZIN	90	100	110	Ω		
Rise/Fall Time (20%~80%)	SD-SDI			1500	ps	3	
	HD-SDI			270			
	3G-SDI			135			
	6G-SDI			80			
	12G-SDI			45			
Output Jitter	Timing Jitter	SD-SDI			0.2	UI	4
		HD-SDI			1		
		3G-SDI			2		
		6G-SDI			4		
		12G-SDI			8		
	Alignment Jitter	SD-SDI			0.2		
		HD-SDI			0.2		
		3G-SDI			0.3		
6G-SDI				0.3			



		12G-SDI				0.3		
TX Disable	Disable		2.0			Vcc	V	
	Enable		0			0.8	V	
TX Fault	Fault		2.0			Vcc	V	
	Normal		0			0.8	V	
Receiver								
Center Wavelength	λ_c	1260			1580	nm		
Receiver Sensitivity@ 11.88Gbps					-11	dBm	5	
Receiver Sensitivity@ 5.94Gbps					-13	dBm		
Receiver Sensitivity@ 2.97Gbps					-15	dBm		
Receiver Overload		1				dBm	6	
LOS De-Assert	LOSD				-18	dBm		
LOS Assert	LOSA	-28				dBm		
LOS Hysteresis	LOSH	1			4	dB		
Data Output Swing Differential	Vout	400	800		800	mV	3	
LOS	High	2.0			Vcc	V		
	Low				0.8	V		

Notes:

1. The optical power is launched into SMF.
2. PECL input, internally AC-coupled and terminated.
3. Rise and fall times, 20% to 80%, are measured following a fourth-order Bessel-Thompson filter with a bandwidth of 0.75 x clock frequency corresponding to the serial data rate.
4. UI means one period.
5. Measured with Pathological Patterns 11.88Gpbs(4096*2160 P60,100% Bars);5.94Gpbs (4096*2160 P29.97,100% Bars);2.97Gpbs (2048*1080 P50,100% Bars).
6. Internally AC-coupled, minimum input overload power for SMPTE ST 2081-1, SMPTE ST 2082-1.

Timing and Electrical

Parameter	Symbol	Min	Typical	Max	Unit
Tx Disable Negate Time	t_on			1	ms
Tx Disable Assert Time	t_off			10	μs
Time To Initialize, including Reset of Tx Fault	t_init			300	ms
Tx Fault Assert Time	t_fault			100	μs
Tx Disable To Reset	t_reset	10			μs
LOS Assert Time	t_loss_on			100	μs
LOS De-assert Time	t_loss_off			100	μs
Serial ID Clock Rate	f_serial_clock		100		KHz
MOD_DEF (0:2)-High	VH	2		Vcc	V
MOD_DEF (0:2)-Low	VL			0.8	V



Diagnostics Specification

Parameter	Range	Unit	Accuracy	Calibration
Tx Disable Negate Time	0 to +70	°C	±3°C	Internal / External
Voltage	3.0 to 3.6	V	±3%	Internal / External
Bias Current	0 to 100	mA	±10%	Internal / External
TX Power	-3to +1	dBm	±3dB	Internal / External
RX Power	-24to +1	dBm	±3dB	Internal / External

I2C Bus Interface

The I2C bus interface uses the 2-wire serial CMOS E2PROM protocol. The serial interface meets the following specifications:

- 1.Support a maximum clock rate of 280Khz.
2. Input/Output levels comply with LVCMOS/LVTTL or compatible logics.

Low: 0 – 0.8 V

High: 2.0 – 3.3 V

Undefined: 0.8 – 2.0 V

Pin Description

Pin	Signal Name	Description	Plug Seq.	Notes
1	VEET	Transmitter Ground	1	
2	TX FAULT	Transmitter Fault Indication	3	Note 1
3	TXDISABLE	Transmitter Disable	3	Note 2
4	MOD_DEF(2)	SDA Serial Data Signal	3	Note 3
5	MOD_DEF(1)	SCL Serial Clock Signal	3	Note 3
6	MOD_DEF(0)	TTL Low	3	Note 3
7	Rate Select	Not Connected	3	
8	LOS	Loss of Signal	3	Note 4
9	VEER	Receiver ground	1	
10	VEER	Receiver ground	1	
11	VEER	Receiver ground	1	
12	RD-	Inv. Received Data Out	3	Note 5
13	RD+	Received Data Out	3	Note 5
14	VEER	Receiver ground	1	
15	VCCR	Receiver Power Supply	2	
16	VCCT	Transmitter Power Supply	2	
17	VEET	Transmitter Ground	1	
18	TD+	Transmit Data In	3	Note 6
19	TD-	Inv. Transmit Data In	3	Note 6
20	VEET	Transmitter Ground	1	

Notes:

Plug Seq.: Pin engagement sequence during hot plugging.

1. TX Fault is an open collector output, which should be pulled up with a 4.7k~10kΩ resistor on the host board to a voltage



between 2.0V and Vcc+0.3V. Logic 0 indicates normal operation; Logic 1 indicates a laser fault of some kind. In the low state, the output will be pulled to less than 0.8V.

2. TX Disable is an input that is used to shut down the transmitter optical output. It is pulled up within the module with a 4.7k~10kΩ resistor. Its states are:

- Low (0 ~0.8V): Transmitter on
- (0.8V ~ 2.0V): Undefined
- High (2.0 ~3.465V): Transmitter Disabled
- Open: Transmitter Disabled

3. Mod-Def 0,1,2. These are the module definition pins. They should be pulled up with a 4.7k~10kΩ resistor on the host board to VCCT or VCCR.

Mod-Def 0 is grounded by the module to indicate that the module is present.

Mod-Def 1 is the clock line of two wire serial interface for serial ID.

Mod-Def 2 is the data line of two wire serial interface for serial ID.

4. LOS is an open collector output, which should be pulled up with a 4.7k~10kΩ resistor on the host board to a voltage between 3.15V and 3.6V. Logic 1 indicates loss of signal; Logic 0 indicates normal operation. In the low state, the output will be pulled to less than 0.8V.

5. RD-/+: These are the differential receiver outputs. They are internally AC-coupled 100 differential lines which should be terminated with 100Ω (differential) on the host .

6. TD-/+: These are the differential transmitter inputs. They are internally AC-coupled, differential lines with 100Ω differential termination inside the module.

Pin Definition

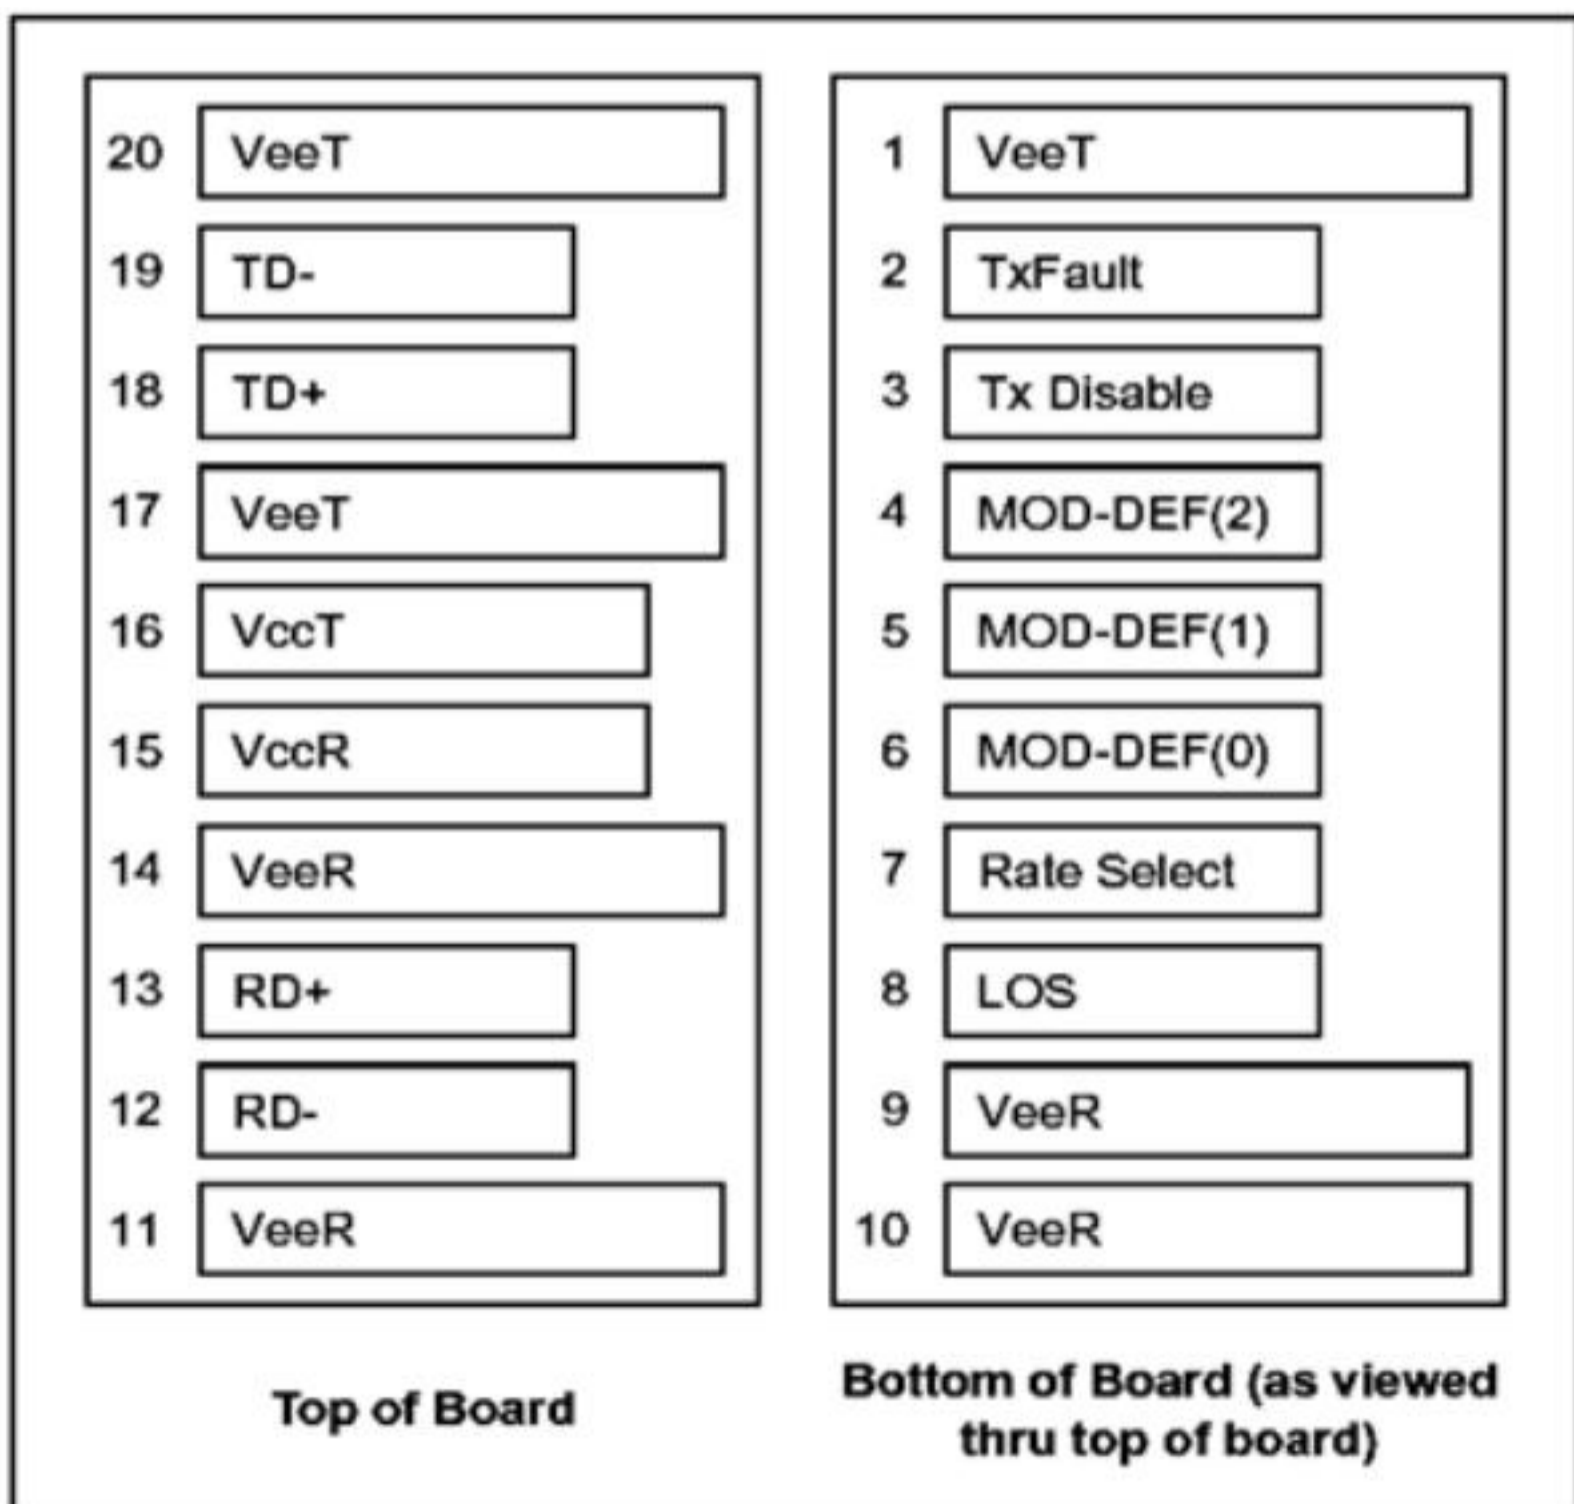


Figure 2. Electrical Pin-out Details



CWDM Wavelength (0~70°C)

Band	Suffix	Wavelength (nm)
O-band Original	A	1270
	B	1290
	C	1310
	D	1330
	E	1350
E-band Extended	F	1370
	G	1390
	H	1410
	I	1430
	J	1450
S-band Short Wavelength	K	1470
	L	1490
	M	1510
	N	1530
C-band Conventional	O	1550
L-band Long Wavelength	P	1570

Mechanical Dimensions

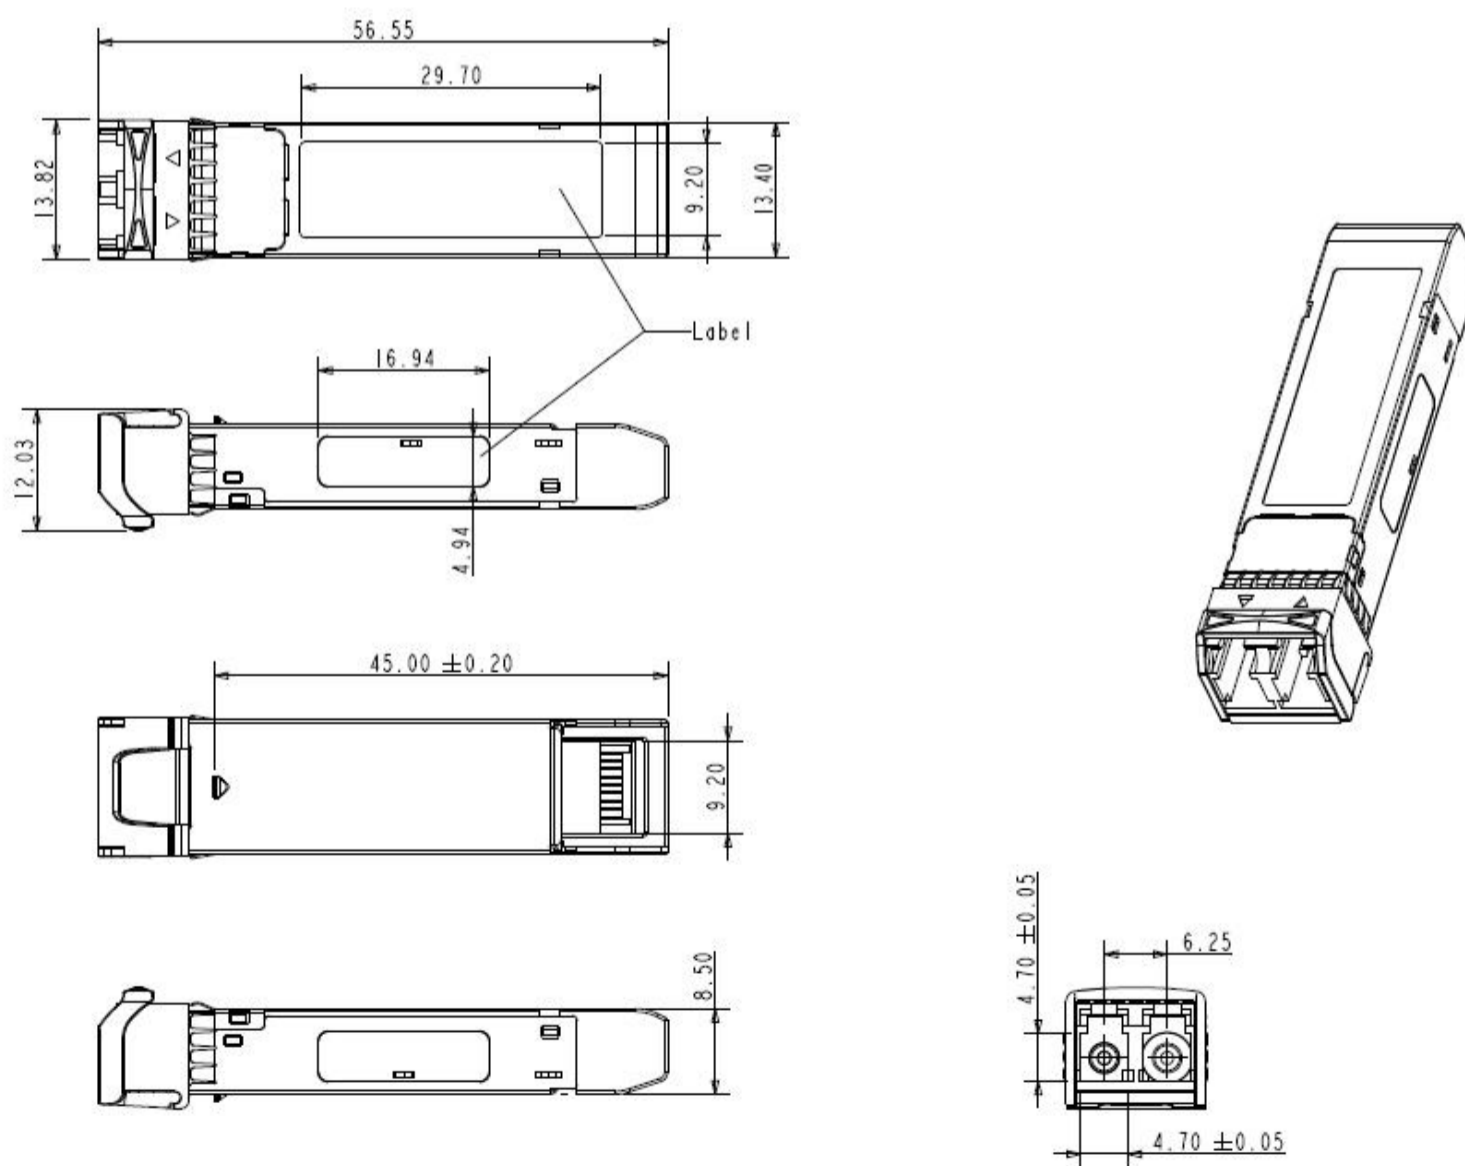


Figure 3. Mechanical Specifications



Regulatory Compliance

Feature	Standard
Laser Safety	IEC 60825-1:2014 (Third Edition)
Environmental protection	2011/65/EU
CE EMC	EN55032: 2015 EN55035: 2017
FCC	FCC Part 15, Subpart B; ANSI C63.4-2014
Product Safety	EN/UL 60950-1, 2nd Edition, 2014-10-14

⚠ CAUTION:

Use of controls or adjustment or performance of procedures other than those specified herein may result in hazardous radiation exposure.

Ordering Information

Part Number	Product Description
FST-12G-27C20	12G-SDI Video CWDM SFP+ 20km Optical Transceiver Module, 1270nm
FST-12G-29C20	12G-SDI Video CWDM SFP+ 20km Optical Transceiver Module, 1290nm
FST-12G-31C20	12G-SDI Video CWDM SFP+ 20km Optical Transceiver Module, 1310nm
FST-12G-33C20	12G-SDI Video CWDM SFP+ 20km Optical Transceiver Module, 1330nm
FST-12G-35C20	12G-SDI Video CWDM SFP+ 20km Optical Transceiver Module, 1350nm
FST-12G-37C20	12G-SDI Video CWDM SFP+ 20km Optical Transceiver Module, 1370nm
FST-12G-39C20	12G-SDI Video CWDM SFP+ 20km Optical Transceiver Module, 1390nm
FST-12G-41C20	12G-SDI Video CWDM SFP+ 20km Optical Transceiver Module, 1410nm
FST-12G-43C20	12G-SDI Video CWDM SFP+ 20km Optical Transceiver Module, 1430nm
FST-12G-45C20	12G-SDI Video CWDM SFP+ 20km Optical Transceiver Module, 1450nm
FST-12G-47C20	12G-SDI Video CWDM SFP+ 20km Optical Transceiver Module, 1470nm
FST-12G-49C20	12G-SDI Video CWDM SFP+ 20km Optical Transceiver Module, 1490nm
FST-12G-51C20	12G-SDI Video CWDM SFP+ 20km Optical Transceiver Module, 1510nm
FST-12G-53C20	12G-SDI Video CWDM SFP+ 20km Optical Transceiver Module, 1530nm
FST-12G-55C20	12G-SDI Video CWDM SFP+ 20km Optical Transceiver Module, 1550nm
FST-12G-57C20	12G-SDI Video CWDM SFP+ 20km Optical Transceiver Module, 1570nm

Important Notice

Performance figures, data and any illustrative material provided in this data sheet are typical and must be specifically confirmed in writing by FiberStamp before they become applicable to any particular order or contract. In accordance with the FiberStamp policy of continuous improvement specifications may change without notice.

The publication of information in this data sheet does not imply freedom from patent or other protective rights of FiberStamp or others. Further details are available from any FiberStamp sales representative.

