

12G-SDI SFP+1310nm 20km Dual Transmitter Module FJB-V123131K20CN

Features

- SD/HD/3G/6G/12G-SDI SFP Dual Transmitter
- ST 259, ST 292-1, ST 424, ST-2081 and ST-2082 compatible
- Metal enclosure for Lower EMI
- 1310nm DFB laser transmitter
- Supports SDI pathological patterns for SD-SDI HD-SDI, 3G-SDI, 6G-SDI and 12G SDI
- With Reclockers in the module
- ROHS compliant (lead free)
- single 3.3V power supply
- Hot-pluggable SFP footprint
- Operating case temperature range: 0 to +70°C



Applications

- Serial Digital Fiber Transmission System for SMPTE ST 259, SMPTE ST 344, SMPTE ST 292-1/2, SMPTE ST 424, SMPTE ST 2081-1 and SMPTE ST 2082-1 Signals
- UHDTV/HDTV/SDTV Service Interfaces

Description

FIBERSTAMP's Video Dual transmitter is designed to transmit data rates from 50Mbps to 11.88Gbps, compliant with SMPTE ST 2082-1 (12G UHD-SDI), ST 2081-1 (6G UHD-SDI), ST424 (3G SDI), ST 292-1 (HD-SDI), and ST 259 (SD-SDI).

FIBERSTAMP's Video transceiver supports SDI pathological patterns signals.

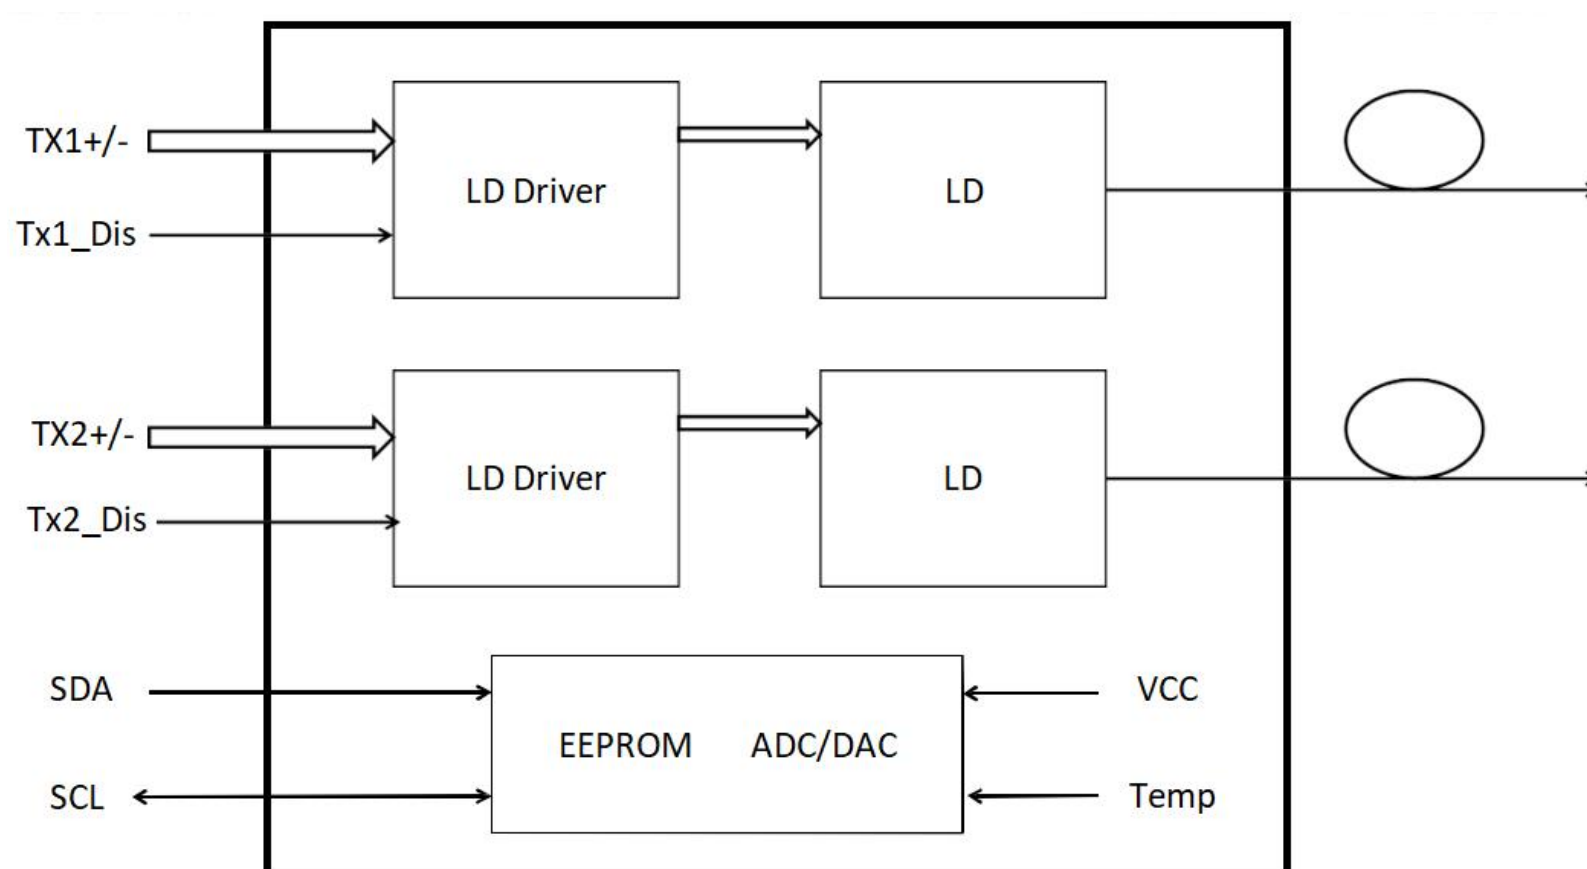


Figure 1. Module Block Diagram



Absolute Maximum Ratings

Parameter	Symbol	Min	Max	Unit
Supply Voltage	Vcc	-0.5	4	V
Storage Temperature	Ts	-40	+85	°C
Operating Humidity	-	5	85	%

Recommended Operating Conditions

Parameter	Symbol	Min	Typical	Max	Unit
Operating Case Temperature	Tc	0		+70	°C
Power Supply Voltage	Vcc	3.13	3.3	3.47	V
Power Supply Current	Icc		320		mA
Data Rate			12		Gbps

Optical and Electrical Characteristics

Parameter		Symbol	Min	Typical	Max	Unit	Notes	
Transmitter								
Center Wavelength		λ_c	1300	1310	1320	nm		
Spectral Width (-20dB)		σ			1	nm		
Side Mode Suppression Ratio		SMSR	30			dB		
Average Output Power		Pout	-3		1	dBm	1	
Extinction Ratio		ER	3.5			dB		
Data Input Swing Differential		VIN	400		1000	mV	2	
Input Differential Impedance		ZIN	90	100	110	Ω		
Rise/Fall Time (20%~80%)		SD-SDI	tr/ff			1500	ps	3
		HD-SDI				270		
		3G-SDI				135		
		6G-SDI				80		
		12G-SDI				45		
Output Jitter	Timing Jitter	SD-SDI				0.2	UI	4
		HD-SDI				1		
		3G-SDI				2		
		6G-SDI				4		
		12G-SDI				8		
	Alignment Jitter	SD-SDI				0.2		
		HD-SDI				0.2		
		3G-SDI				0.3		
		6G-SDI				0.3		
		12G-SDI				0.3		



Note:

- ## Diagnostics Specification

I²C Bus Interface

1. Support a maximum clock rate of 280Khz.
2. Input/Output levels comply with LVCMOS/LVTTL or compatible logics.

Low: 0 – 0.8 V

High: 2.0 – 3.3 V

Undefined: 0.8 – 2.0 V

Pin Description



Pin	Signal Name	Description	Plug Seq.	Notes
13	RX1+	Receiver Non-Inverted Data Output1	3	Note 3
14	VEE	Receiver ground	1	
15	VCC	Receiver Power Supply	2	
16	VCC	Receiver Power Supply	2	
17	VEE	Receiver ground	1	
18	NC	Not Connected	3	
19	NC	Not Connected	3	
20	NC	Not Connected	1	

Note:

Plug Seq: Pin engagement sequence during hot plugging.

1.TXn_DIS is used to shut down the transmitter optical output. It is pulled up within the module with a 4.7k~10kΩ resistor. Its states are:

Low (0 to 0.8V): Transmitter on

(0.8V~2.0V): Undefined

High (2.0 to 3.465V): Transmitter Disabled

Open: Transmitter Disabled

2.SCL,SDA. They should be pulled up with a 4.7k~10kΩ resistor on the host board to a voltage between 3.15V and 3.46V.

SCL is the clock line of two wire serial interface for serial ID. SDA is the data line of two wire serial interface for serial ID.

3. TX1-/+, TX2-/+: They are the differential transmitter inputs, internally AC-coupled, differential 100Ω termination inside the module.

Pin Definition

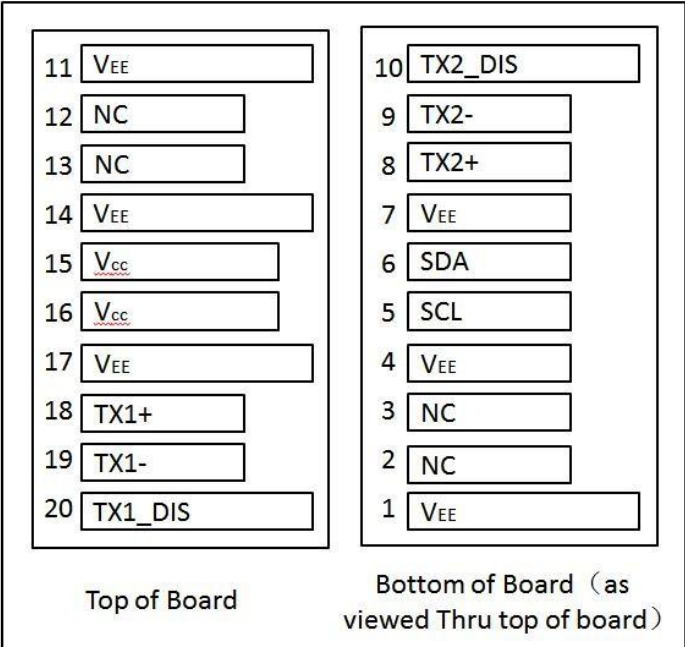


Figure 2. Electrical Pin-out Details



Mechanical Dimensions

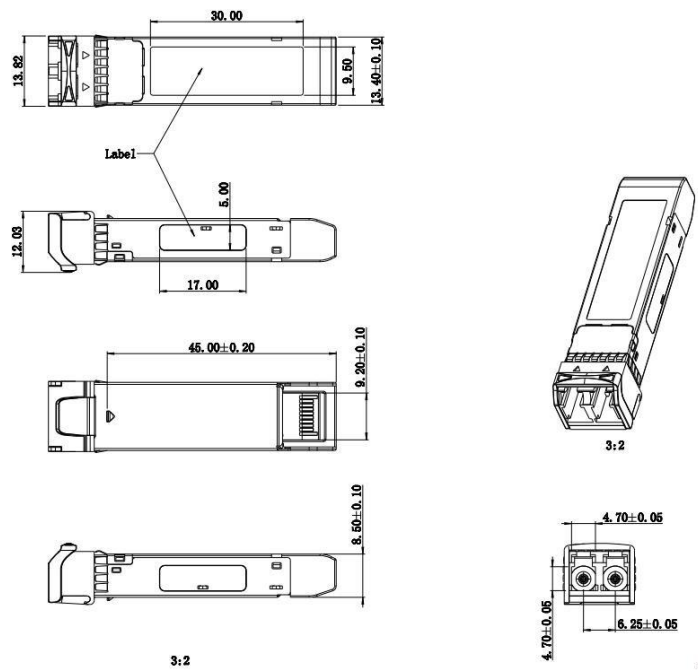


Figure 3. Mechanical Specifications

Regulatory Compliance

Feature	Standard
Laser Safety	IEC 60825-1:2014 (3rd Edition) IEC 60825-2:2004/AMD2:2010 EN 60825-1-2014 EN 60825-2:2004+A1+A2
Electrical Safety	EN 62368-1: 2014 IEC 62368-1:2014 UL 62368-1:2014
Environmental protection	Directive 2011/65/EU with amendment(EU)2015/863
CE EMC	EN55032 2015 EN55035 2017 EN61000-3-2:2014 EN61000-3-3:2013
FCC	FCC Part 15, Subpart B ANSI C63.4-2014

⚠ CAUTION:

Use of controls or adjustment or performance of procedures other than those specified herein may result in hazardous radiation exposure.

Ordering Information

Part Number	Product Description
FJB-V123131K20CN	1310nm, 10/20km,SD/HD/3G/6G/12G SDI Dual Transmitter

Important Notice

Performance figures,data and any illustrative material provided in this data sheet are typical and must be specifically confirmed in writing by FIBERSTAMP before they become applicable to any particular order or contract. In accordance with the FIBERSTAMP policy of continuous improvement specifications may change without notice.

The publication of information in this data sheet does not imply freedom from patent or other protective rights of FIBERSTAMP or others. Further details are available from any FIBERSTAMP sales representative.