

Industrial 25G CPRI/eCPRI DWDM SFP28 10km Optical Transceiver Module

Features

- Hot-pluggable SFP28 form factor
- Full-duplex transceiver modules
- Cooled DWDM EML TOSA and APD ROSA
- Internal CDR on both transmitter and receiver channels
- Compliant with SFP28 MSA, 25G Ethernet and CPRI/eCPRI specifications
- Data rate up to 25.78125Gbps
- Wavelength options: 1528nm-1563nm (100GHz spacing)
- Reach up to 10km over SMF
- Power consumption < 3.5W
- Dual LC receptacles
- Operating case temperature range from -40°C to +85°C
- 3.3V power supply voltage
- RoHS compliant (lead free)



Applications

- CPRI Option 10

Description

This product is a 24.33~25.78Gbps transceiver, designed for optical communication compliant to CPRI Option 10 standard, 25GBase. Its high performance cooled DWDM EML transmitter and high sensitivity APD receiver provide superior performance for CPRI/Enthernet application up to 10km (with FEC) Links.

The product is designed with form factor, optical/electrical connection according to the SFP+ Multi-Source Agreement (MSA)

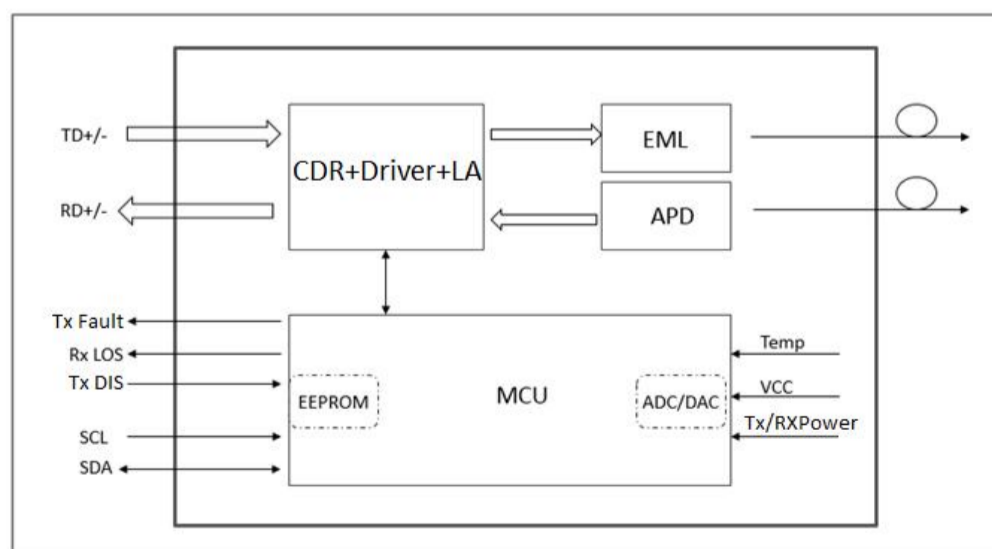


Figure 1. Module Block Diagram

The SFP28 is a are Enhanced Small Form Factor Pluggable SFP+ transceivers, and can be contacted through I2C serial interface.





Absolute Maximum Ratings

Parameter	Symbol	Min	Max	Unit
Supply Voltage	Vcc	-0.3	+3.8	V
Input Voltage	Vin	-0.3	Vcc+0.3	V
Storage Temperature	Ts	-40	+85	°C
Case Operating Temperature	Tc	-40	+85	°C
Humidity (non-condensing)	Rh	0	85	%

Recommended Operating Conditions

Parameter	Symbol	Min	Typical	Max	Unit
Supply Voltage	Vcc	+3.14	+3.3	+3.47	V
Operating Case Temperature	Tc	-40		+85	°C
Data Rate Per Lane	fd		24.33	25.78125	Gb/s
Humidity	Rh	0		85	%
Power Dissipation	Pm			2	W
Fiber Bend Radius	Rb	3			cm

Electrical Specifications

Parameter	Symbol	Min	Typical	Max	Unit
Differential Input Impedance	Zin	90	100	110	ohm
Differential Output Impedance	Zout	90	100	110	ohm
Differential Input Voltage Amplitude1	ΔVin	300		1100	mVp-p
Differential Output Voltage Amplitude2	ΔVout	500		800	mVp-p
Skew	Sw			300	ps
Bit Error Rate	BER		5×10 ⁻⁵		
Input Logic Level High	VIH	+2.0		Vcc	V
Input Logic Level Low	VIL	0		+0.8	V
Output Logic Level High	VOH	Vcc-0.5		Vcc	V
Output Logic Level Low	VOL	0		+0.4	V

Notes:

1. Differential input voltage amplitude is measured between TxnP and TxnN.
2. Differential output voltage amplitude is measured between RxnP and RxnN.



Optical Characteristics

Parameter	Symbol	Min	Typical	Max	Unit
Transmitter					
Optical Wavelength	λ_c	As per ITU-T 694.1			nm
Center Wavelength (End of Life)	λ_{c_EOL} $\lambda_{c\pm 100\text{pm}}$	$\lambda_{c\pm 100\text{pm}}$			
Side-Mode Suppression Ratio	SMSR	24			dB
Average Launch Power	P _{out}	0		+4	dBm
Optical Modulation Amplitude	OMA	0		+4	dBm
Extinction Ratio	ER	3			dB
Average Launch Power of OFF Transmitter	P _{off}			-30	dB
R _{in20OMA}				-130	dB/HZ
Optical return loss tolerance				20	dB
Eye Mask Coordinates[1]: X1, X2, X3, Y1, Y2, Y3	{0.31, 0.4, 0.45, 0.34, 0.38, 0.4}				
Receiver					
Center Wavelength	λ_c	1260		1600	nm
Average Power at Receiver Input (each lane)		-17		-5	dBm
Receiver Sensitivity in OMA[2]	SensOMA			-12	dBm
Stressed Receiver Sensitivity in OMA[2]				-10	dBm
Receiver Reflectance	RR			-26	dB
LOS Assert	LOSA	-30			dBm
LOS De-Assert	LOSD			-17	dBm
LOS Hysteresis	LOSH	0.5			dB

Notes:

1. Hit Ratio = 5E-5
2. Measured with conformance test signal at TP3 for 24.33G@1E-12, 25.78G@BER=1E-5.



Pin Description

Pin	Logic	Symbol	Name/Description	Note
1		VeeT	Module Transmitter Ground	1
2	LVTTTL-O	TX_Fault	Module Transmitter Fault	2
3	LVTTTL-I	TX_Dis	Transmitter Disable; Turns off transmitter laser output	
4	LVTTTL-I/O	SDA	2-Wire Serial Interface Data Line	2
5	LVTTTL-I	SCL	2-Wire Serial Interface Clock	2
6		MOD_ABS	Module Definition, Grounded in the module	
7	LVTTTL-I	RS0	Receiver Rate Select	
8	LVTTTL-O	RX_LOS	Receiver Loss of Signal Indication Active LOW	
9	LVTTTL-I	RS1	Transmitter Rate Select (not used)	
10		VeeR	Module Receiver Ground	1
11		VeeR	Module Receiver Ground	1
12	CML-O	RD-	Receiver Inverted Data Output	
13	CML-O	RD+	Receiver Data Output	
14		VeeR	Module Receiver Ground	1
15		VccR	Module Receiver 3.3 V Supply	
16		VccT	Module Receiver 3.3 V Supply	
17		VeeT	Module Transmitter Ground	1
18	CML-I	TD+	Transmitter Non-Inverted Data Input	
19	CML-I	TD-	Transmitter Inverted Data Input	
20		VeeT	Module Transmitter Ground	1

Notes:

1. Module ground pins GND are isolated from the module case.
2. Shall be pulled up with 4.7K-10Kohms to a voltage between 3.15V and 3.45V on the host board.

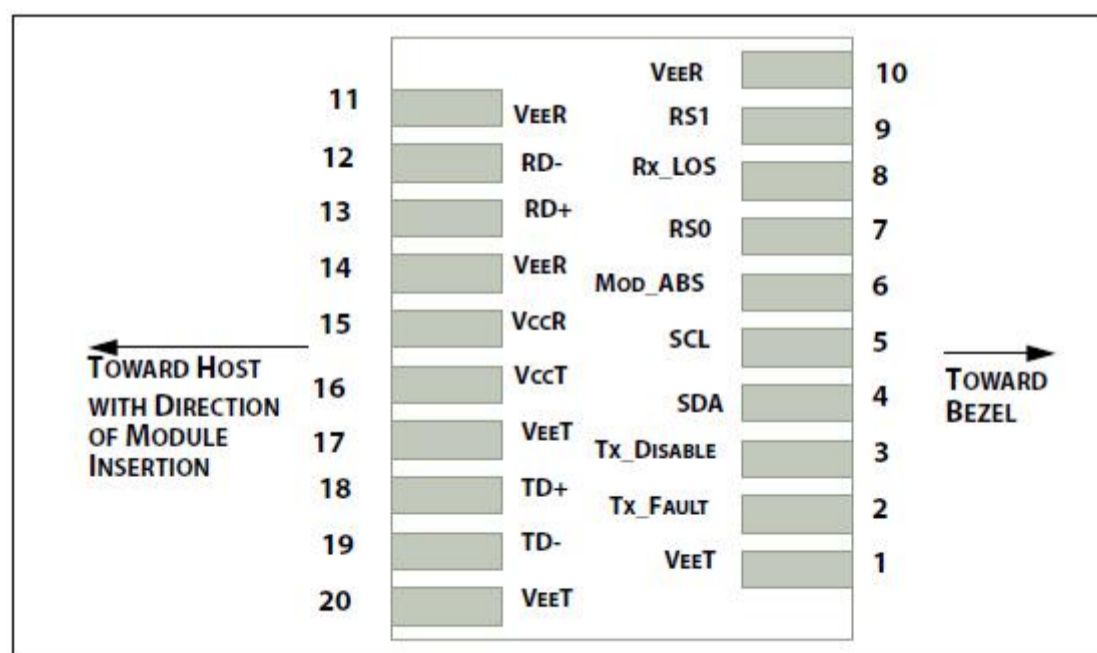


Figure 2. Electrical Pin-out Details



TX_FAULT Pin

Tx_Fault is a module output that when high, indicates that the module transmitter has detected a fault condition related to laser operation or safety. The Tx_Fault output is an open drain/collector and shall be pulled up to the Vcc_Host in the host with a resistor in the range 4.7 kΩ to 10 kΩ.

TX_DISABLE Pin

When Tx_Disable is asserted high or left open, the SFP+ module transmitter output shall be turned off unless the module is a passive cable assembly. This contact shall be pulled up to VccT with a 4.7 kΩ to 10 kΩ resistor in modules and cable assemblies. Tx_Disable is a module input contact.

RS0/RS1 Pin

RS0 and RS1 are module inputs and are pulled low to VeeT with > 30 kΩ resistors in the module. RS0 optionally selects the optical receive signaling rate coverage. RS1 optionally selects the optical transmit signaling rate coverage.

MOD_ABS Pin

Mod_ABS is connected to VeeT or VeeR in the SFP+ module. The host may pull this contact up to Vcc_Host with a resistor in the range 4.7 kΩ to 10 kΩ. Mod_ABS is asserted "High" when the SFP+ module is physically absent from a host slot. In the SFP MSA (INF-8074i) this contact has the same function but is called MOD_DEF0.

RX_LOS Pin

Rx_LOS when high indicates an optical signal level below that specified in the relevant standard. Rx_LOS is an open drain/collector output, but may also be used as an input by supervisory circuitry in the module. For a nominally 3.3 V Vcc_Host using a resistive pull up to Vcc_Host the resistor value shall be in the range 4.7 kΩ to 10 kΩ. For a nominally 2.5 V Vcc_Host using a resistive pull up to Vcc_Host the resistor value shall be in the range 4.7 kΩ to 7.2 kΩ.

Recommended Interface Circuit

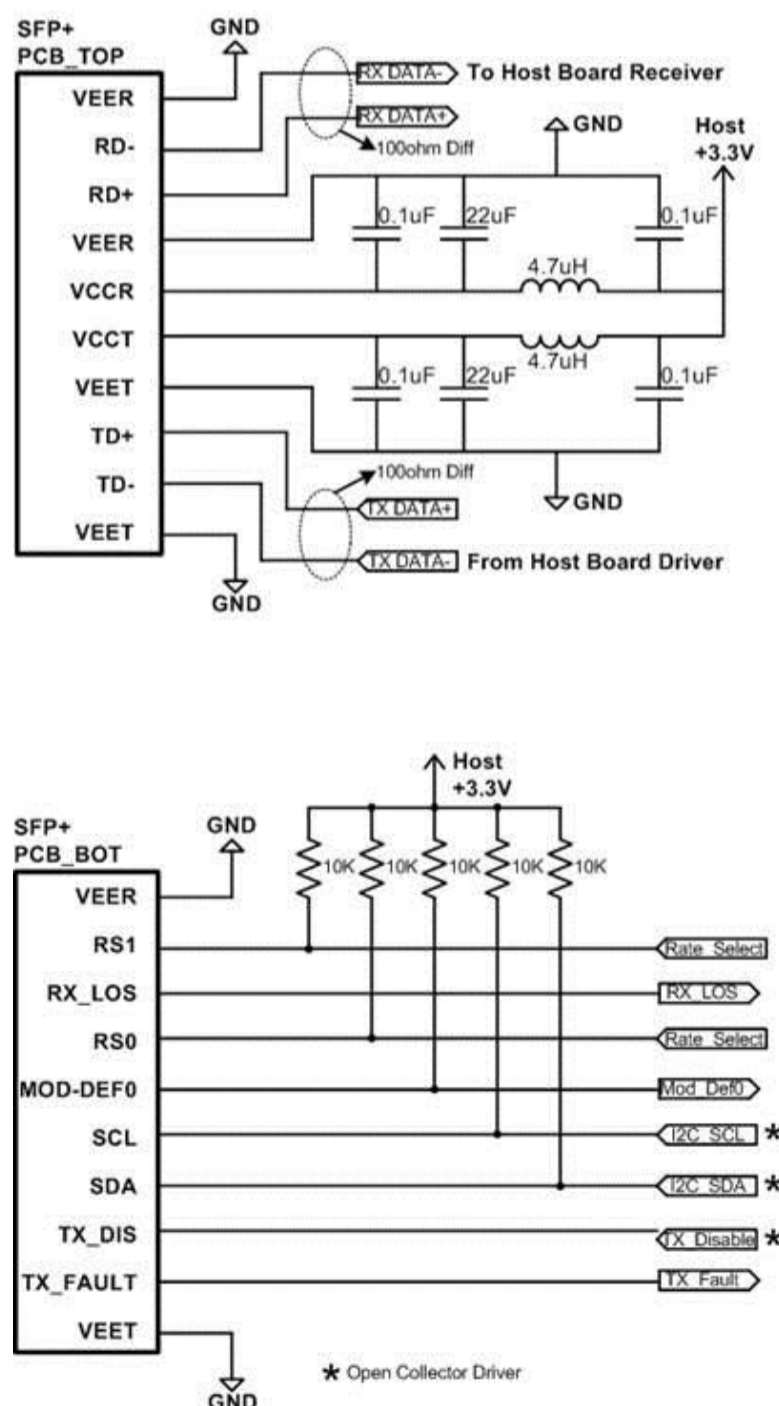


Figure 3. Recommended Interface Circuit



Memory Organization

The transceivers provide serial ID memory contents and diagnostic information about the present operating conditions by the 2-wire serial interface (SCL, SDA).

The memory map specific data field defines as following.

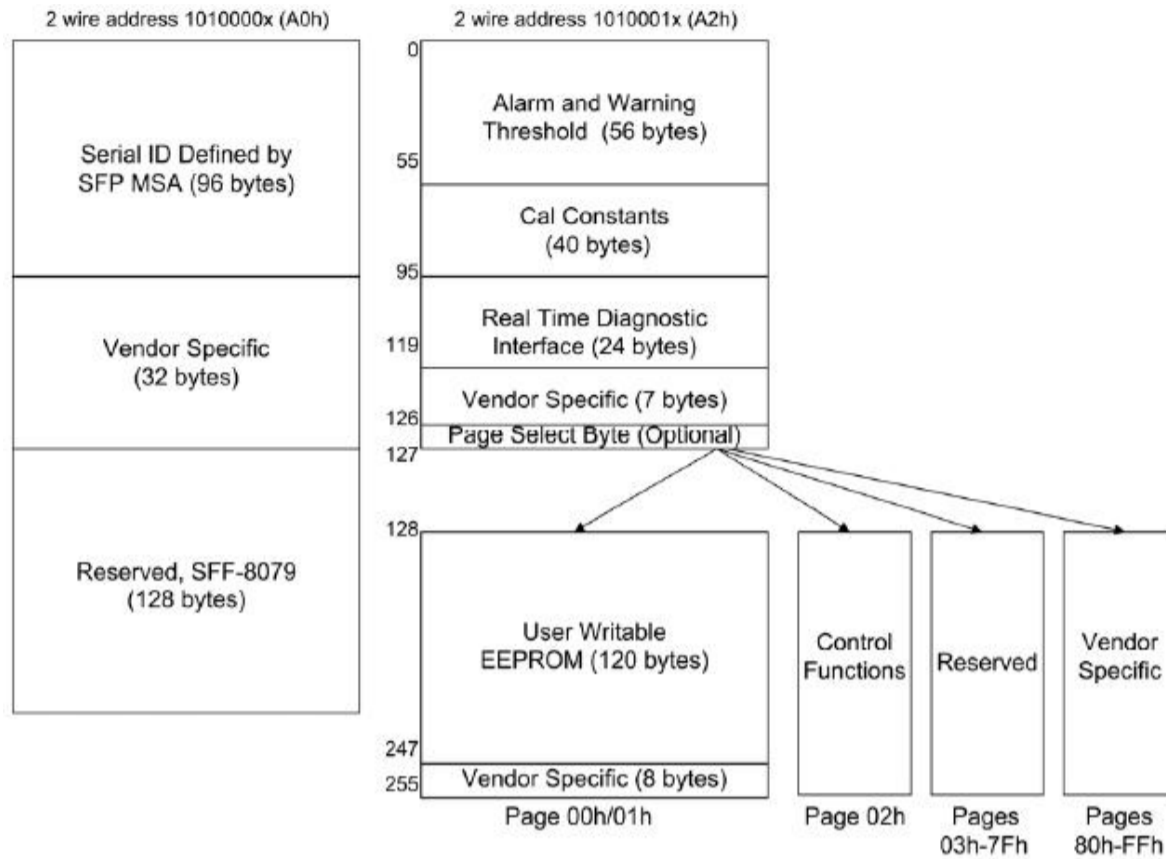


Figure 5. SFP28 Memory Map

Timing and Electrical

Parameter	Symbol	Min.	Max.	Unit	Conditions
Tx_Disable assert time	t_off		100	µs	Rising edge of Tx_Disable to fall of output signal below 10% of nominal
Tx_Disable negate time	t_on		2	ms	Falling edge of Tx_Disable to rise of output signal above 90% of nominal. This only applies in normal operation, not during start up or fault recovery.
Time to initialize 2-wire interface	t_2w_start_up		300	ms	From power on or hot plug after the supply meeting Table 8.
Time to initialize	t_start_up		300	ms	From power supplies meeting Table 8 or hot plug or Tx disable negated during power up, or Tx_Fault recovery, until non-cooled power level I part (or non-cooled power level II part already enabled at power level II for Tx_Fault recovery) is fully operational.
Time to initialize cooled module and time to power up a cooled module to Power Level II	t_start_up_cooled		90	s	From power supplies meeting Table 8 or hot plug, or Tx disable negated during power up or Tx_Fault recovery, until cooled power level I part (or cooled power level II part during fault recovery) is fully operational. Also, from stop bit low-to-high SDA transition enabling Power Level II until cooled module is fully operational
Time to Power Up to Level II	t_power_level2		300	ms	From stop bit low-to-high SDA transition enabling power level II until non-cooled module is fully operational
Time to Power Down from Level II	t_power_down		300	ms	From stop bit low-to-high SDA transition disabling power level II until module is within power level I requirements
Tx_Fault assert	Tx_Fault_on		1	ms	From occurrence of fault to assertion of Tx_Fault
Tx_Fault assert for cooled module	Tx_Fault_on_cooled		50	ms	From occurrence of fault to assertion of Tx_Fault
Tx_Fault Reset	t_reset	10		µs	Time Tx_Disable must be held high to reset Tx_Fault
RS0, RS1 rate select timing for FC	t_RS0_FC, t_RS1_FC		500	µs	From assertion till stable output
RS0, RS1 rate select timing non FC	t_RS0, t_RS1		24	ms	From assertion till stable output
Rx_LOS assert delay	t_los_on		100	µs	From occurrence of loss of signal to assertion of Rx_LOS
Rx_LOS negate delay	t_los_off		100	µs	From occurrence of presence of signal to negation of Rx_LOS



Mechanical Dimensions

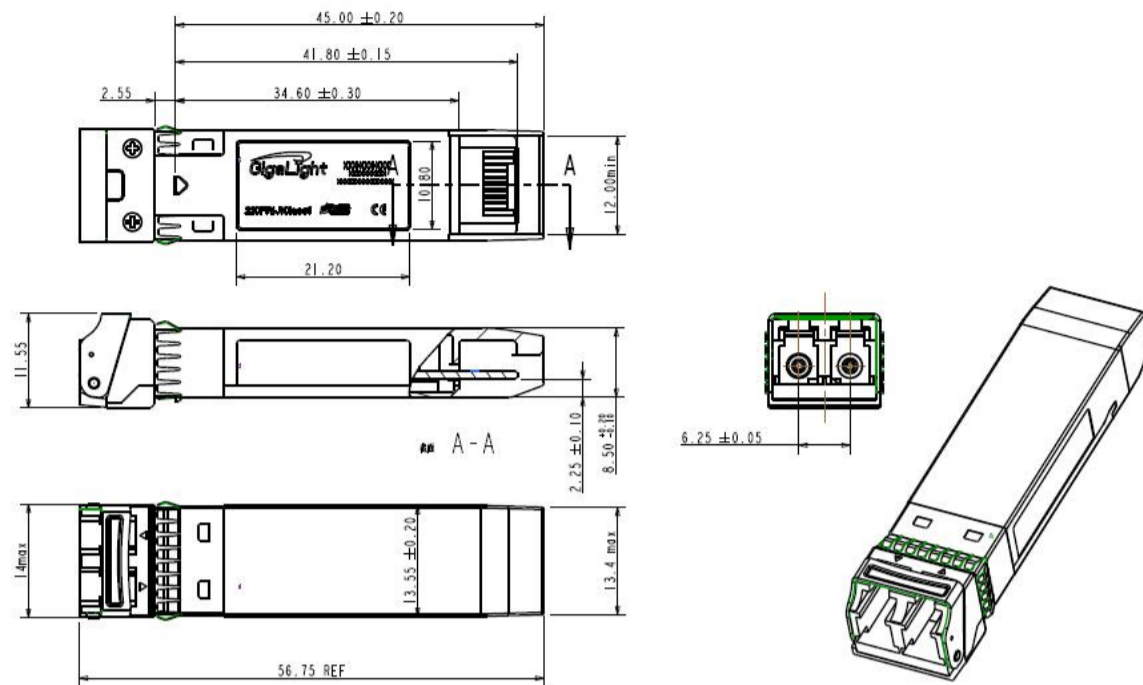


Figure 6. Mechanical Specifications

Regulatory Compliance

FiberStamp Industrial 25G CPRI/eCPRI DWDM SFP28 10km Optical Transceiver Module transceivers are Class 1 Laser Products. They are certified per the following standards:

Feature	Standard
Laser Safety	IEC 60825-1:2014 (Third Edition)
Environmental protection	2011/65/EU
CE EMC	EN55032: 2015 EN55035: 2017 EN61000-3-2:2014 EN61000-3-3:2013
FCC	FCC Part 15, Subpart B; ANSI C63.4-2014

References

- 1 . SFP28 MSA
- 2 . Ethernet IEEE802.3cc
- 3 . Directive 2011/65/EU of the European Parliament and of the Council, "on the restriction of the use of certain hazardous substances in electrical and electronic equipment," July 1, 2011.

⚠ CAUTION:

Use of controls or adjustment or performance of procedures other than those specified herein may result in hazardous radiation exposure.

Ordering Information

Part Number	Product Description
FST-25G-18D10-I	Industrial 25G CPRI/eCPRI DWDM SFP28 1563.05nm 10km Optical Transceiver Module
FST-25G-19D10-I	Industrial 25G CPRI/eCPRI DWDM SFP28 1562.23nm 10km Optical Transceiver Module
FST-25G-20D10-I	Industrial 25G CPRI/eCPRI DWDM SFP28 1561.42nm 10km Optical Transceiver Module
FST-25G-21D10-I	Industrial 25G CPRI/eCPRI DWDM SFP28 1560.61nm 10km Optical Transceiver Module
FST-25G-22D10-I	Industrial 25G CPRI/eCPRI DWDM SFP28 1559.79nm 10km Optical Transceiver Module
FST-25G-23D10-I	Industrial 25G CPRI/eCPRI DWDM SFP28 1558.98nm 10km Optical Transceiver Module



FST-25G-24D10-I	Industrial 25G CPRI/eCPRI DWDM SFP28 1558.17nm 10km Optical Transceiver Module
FST-25G-25D10-I	Industrial 25G CPRI/eCPRI DWDM SFP28 1557.36nm 10km Optical Transceiver Module
FST-25G-26D10-I	Industrial 25G CPRI/eCPRI DWDM SFP28 1556.55nm 10km Optical Transceiver Module
FST-25G-27D10-I	Industrial 25G CPRI/eCPRI DWDM SFP28 1555.75nm 10km Optical Transceiver Module
FST-25G-28D10-I	Industrial 25G CPRI/eCPRI DWDM SFP28 1554.94nm 10km Optical Transceiver Module
FST-25G-29D10-I	Industrial 25G CPRI/eCPRI DWDM SFP28 1554.13nm 10km Optical Transceiver Module
FST-25G-30D10-I	Industrial 25G CPRI/eCPRI DWDM SFP28 1553.33nm 10km Optical Transceiver Module
FST-25G-31D10-I	Industrial 25G CPRI/eCPRI DWDM SFP28 1552.52nm 10km Optical Transceiver Module
FST-25G-32D10-I	Industrial 25G CPRI/eCPRI DWDM SFP28 1551.72nm 10km Optical Transceiver Module
FST-25G-33D10-I	Industrial 25G CPRI/eCPRI DWDM SFP28 1550.92nm 10km Optical Transceiver Module
FST-25G-34D10-I	Industrial 25G CPRI/eCPRI DWDM SFP28 1550.12nm 10km Optical Transceiver Module
FST-25G-35D10-I	Industrial 25G CPRI/eCPRI DWDM SFP28 1549.32nm 10km Optical Transceiver Module
FST-25G-36D10-I	Industrial 25G CPRI/eCPRI DWDM SFP28 1548.51nm 10km Optical Transceiver Module
FST-25G-37D10-I	Industrial 25G CPRI/eCPRI DWDM SFP28 1547.72nm 10km Optical Transceiver Module
FST-25G-38D10-I	Industrial 25G CPRI/eCPRI DWDM SFP28 1546.92nm 10km Optical Transceiver Module
FST-25G-39D10-I	Industrial 25G CPRI/eCPRI DWDM SFP28 1546.12nm 10km Optical Transceiver Module
FST-25G-40D10-I	Industrial 25G CPRI/eCPRI DWDM SFP28 1545.32nm 10km Optical Transceiver Module
FST-25G-41D10-I	Industrial 25G CPRI/eCPRI DWDM SFP28 1544.53nm 10km Optical Transceiver Module
FST-25G-42D10-I	Industrial 25G CPRI/eCPRI DWDM SFP28 1543.73nm 10km Optical Transceiver Module
FST-25G-43D10-I	Industrial 25G CPRI/eCPRI DWDM SFP28 1542.94nm 10km Optical Transceiver Module
FST-25G-44D10-I	Industrial 25G CPRI/eCPRI DWDM SFP28 1542.14nm 10km Optical Transceiver Module
FST-25G-45D10-I	Industrial 25G CPRI/eCPRI DWDM SFP28 1541.35nm 10km Optical Transceiver Module
FST-25G-46D10-I	Industrial 25G CPRI/eCPRI DWDM SFP28 1540.56nm 10km Optical Transceiver Module
FST-25G-47D10-I	Industrial 25G CPRI/eCPRI DWDM SFP28 1539.77nm 10km Optical Transceiver Module
FST-25G-48D10-I	Industrial 25G CPRI/eCPRI DWDM SFP28 1538.98nm 10km Optical Transceiver Module
FST-25G-49D10-I	Industrial 25G CPRI/eCPRI DWDM SFP28 1538.19nm 10km Optical Transceiver Module
FST-25G-50D10-I	Industrial 25G CPRI/eCPRI DWDM SFP28 1537.40nm 10km Optical Transceiver Module
FST-25G-51D10-I	Industrial 25G CPRI/eCPRI DWDM SFP28 1536.61nm 10km Optical Transceiver Module
FST-25G-52D10-I	Industrial 25G CPRI/eCPRI DWDM SFP28 1535.82nm 10km Optical Transceiver Module
FST-25G-53D10-I	Industrial 25G CPRI/eCPRI DWDM SFP28 1535.04nm 10km Optical Transceiver Module
FST-25G-54D10-I	Industrial 25G CPRI/eCPRI DWDM SFP28 1534.25nm 10km Optical Transceiver Module
FST-25G-55D10-I	Industrial 25G CPRI/eCPRI DWDM SFP28 1533.47nm 10km Optical Transceiver Module
FST-25G-56D10-I	Industrial 25G CPRI/eCPRI DWDM SFP28 1532.68nm 10km Optical Transceiver Module
FST-25G-57D10-I	Industrial 25G CPRI/eCPRI DWDM SFP28 1531.90nm 10km Optical Transceiver Module
FST-25G-58D10-I	Industrial 25G CPRI/eCPRI DWDM SFP28 1531.12nm 10km Optical Transceiver Module
FST-25G-59D10-I	Industrial 25G CPRI/eCPRI DWDM SFP28 1530.33nm 10km Optical Transceiver Module
FST-25G-60D10-I	Industrial 25G CPRI/eCPRI DWDM SFP28 1529.55nm 10km Optical Transceiver Module



Important Notice

Performance figures, data and any illustrative material provided in this data sheet are typical and must be specifically confirmed in writing by FiberStamp before they become applicable to any particular order or contract. In accordance with the FiberStamp policy of continuous improvement specifications may change without notice.

The publication of information in this data sheet does not imply freedom from patent or other protective rights of FiberStamp or others. Further details are available from any FiberStamp sales representative.

