

800G QSFP-DD to 4x200G QSFP112 ACC**P/N: FZL4J-800XXM05C****Features**

- ✓ Hot-plug QSFP-DD and QSFP112 form factor
- ✓ Support 8x 50/100Gb/s PAM4 modulation with 16 pairs
- ✓ Support up to 5m length
- ✓ 100 ohm differential impedance system
- ✓ 3.3V power supply & typical power consumption 3.5W
- ✓ Commercial case temperature range of 0°C to 70°C
- ✓ I2C management

Applications

- ✓ Infiniband NDR/HDR/EDR
- ✓ Switch / router / HBA
- ✓ Enterprise network
- ✓ Data Center Network
- ✓ Data storage and communication industry

**STANDARDS COMPLIANCE**

- ✓ IEEE P802.3ck D3.0
- ✓ QSFP-DD/QSFP112 MSA HW Rev 6.01
- ✓ CMIS 4.0
- ✓ RoHS


Description

FIBERSTAMP's ACC (Active Copper Cable) assembly series product provide superior signal integrity performance and reliability, comparing to PCC and AOC, ACC is a re-drive solution which built-in linear equalizer to compensate transmission loss, it is an effective solution with low power, low latency, low cost to help high-speed data centers even AI high-computational applications.

FIBERSTAMP's FZL4J-800XXM05C cable assemblies are effective alternatives to fiber optics. The cable connects data signals from each of the 16 pairs on the single QSFP-DD end to the quad QSFP112 ends, each pair operates at data rates of up to 100Gb/s, each QSFP-DD/QSFP112 port can be addressed by EEPROM to provide product information, which can be read or write by I2C interface, it's a high performance & cost effective I/O solutions for LAN, HPC and SAN.



Block Diagram

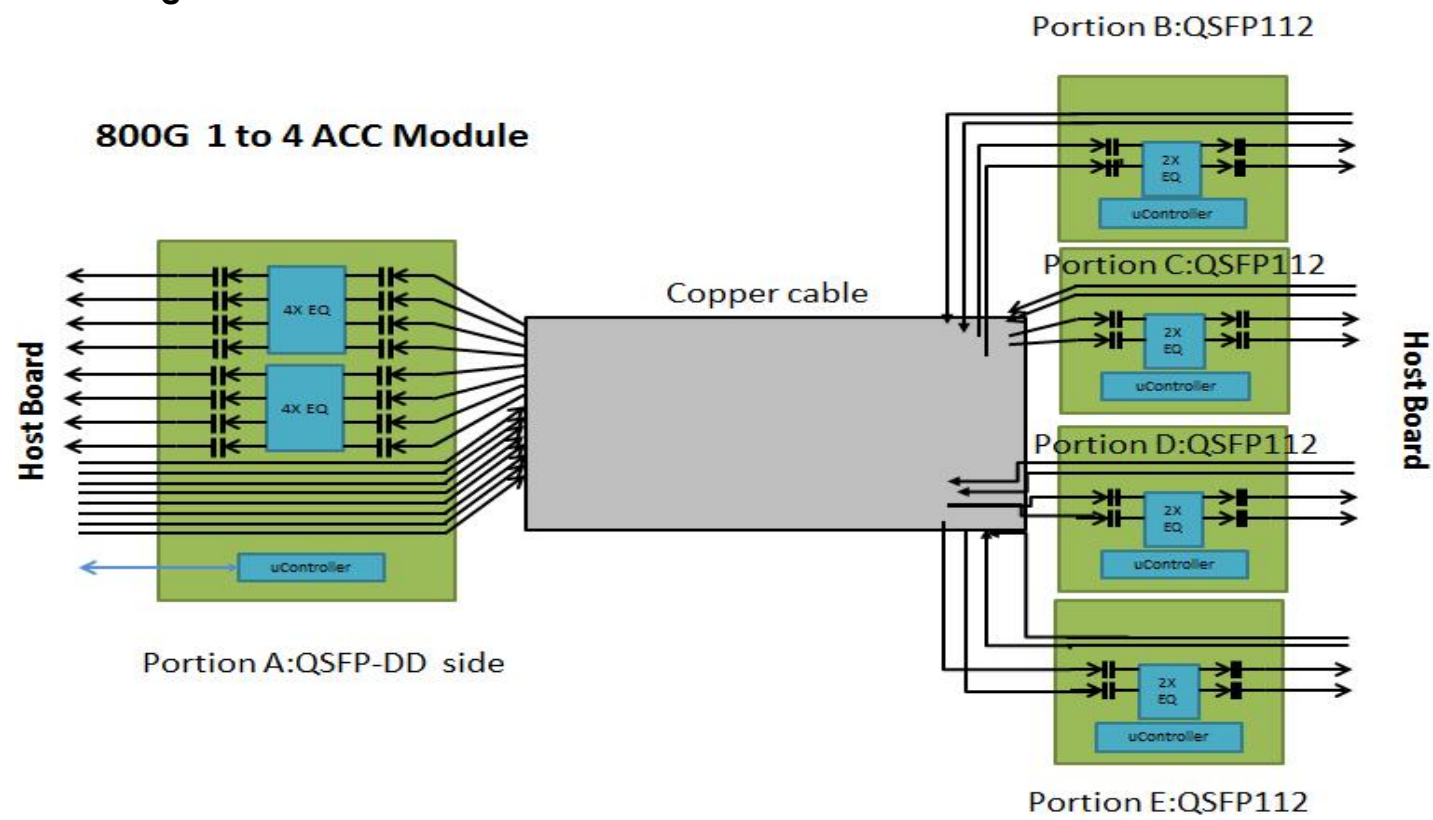


Absolute Maximum Ratings

Parameter	Symbol	Min	Max	Unit
Storage Temperature	T _s	-20	85	°C
Case Operating Temperature	T _c	0	70	°C
Humidity (non-condensing)	Rh	5	95	%


Recommended Operating Conditions

Parameter	Symbol	Min	Typical	Max	Unit
Operating Temperature Case	T _c	0		70	°C
Baud Rate per Lane (PAM4)	fd		53.125		GBaud/s
Humidity	Rh	5		85	%


Mechanical Dimensions

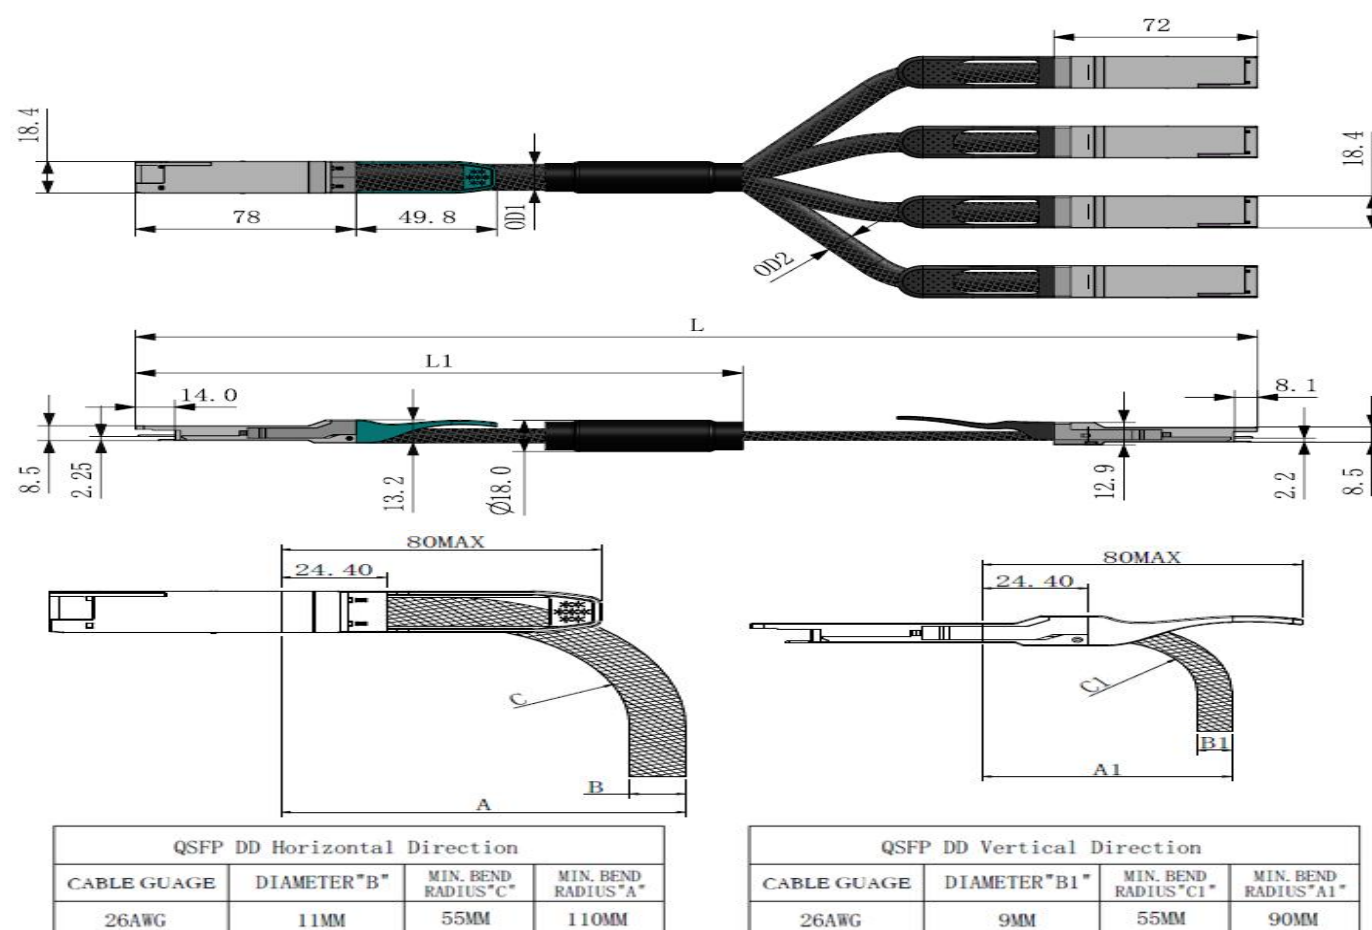


QSFP-DD Electrical pinout

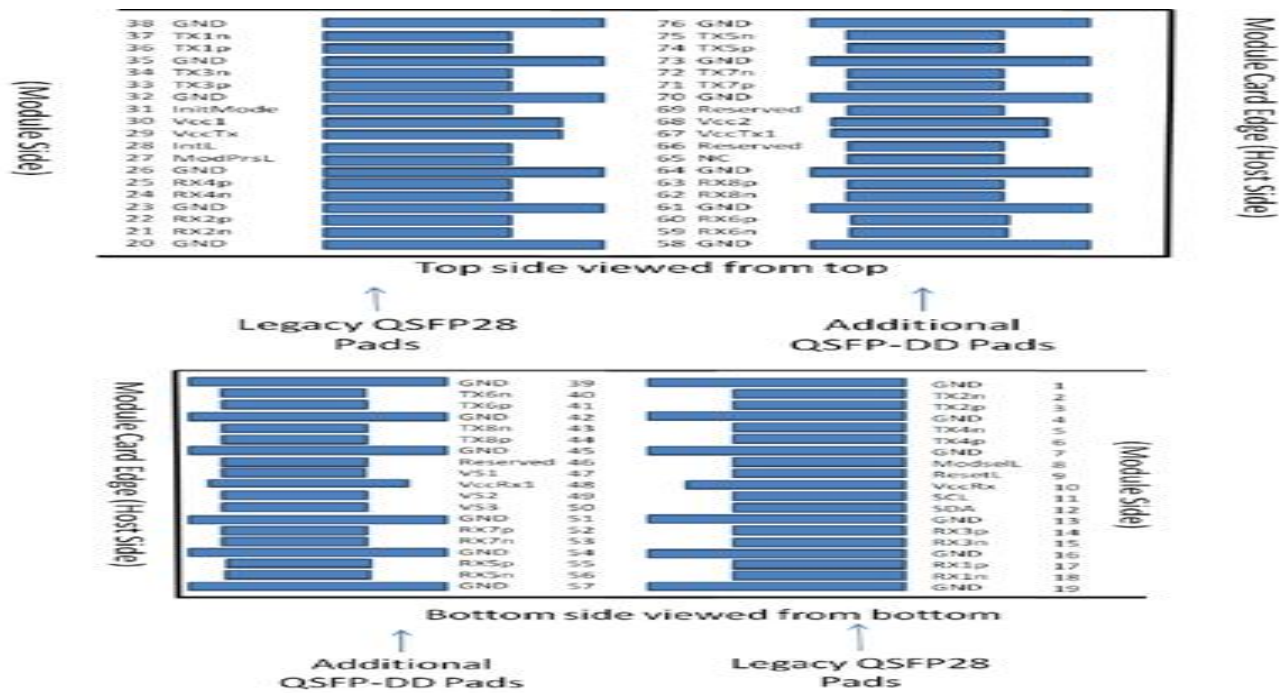

QSFP112 Electrical pinout

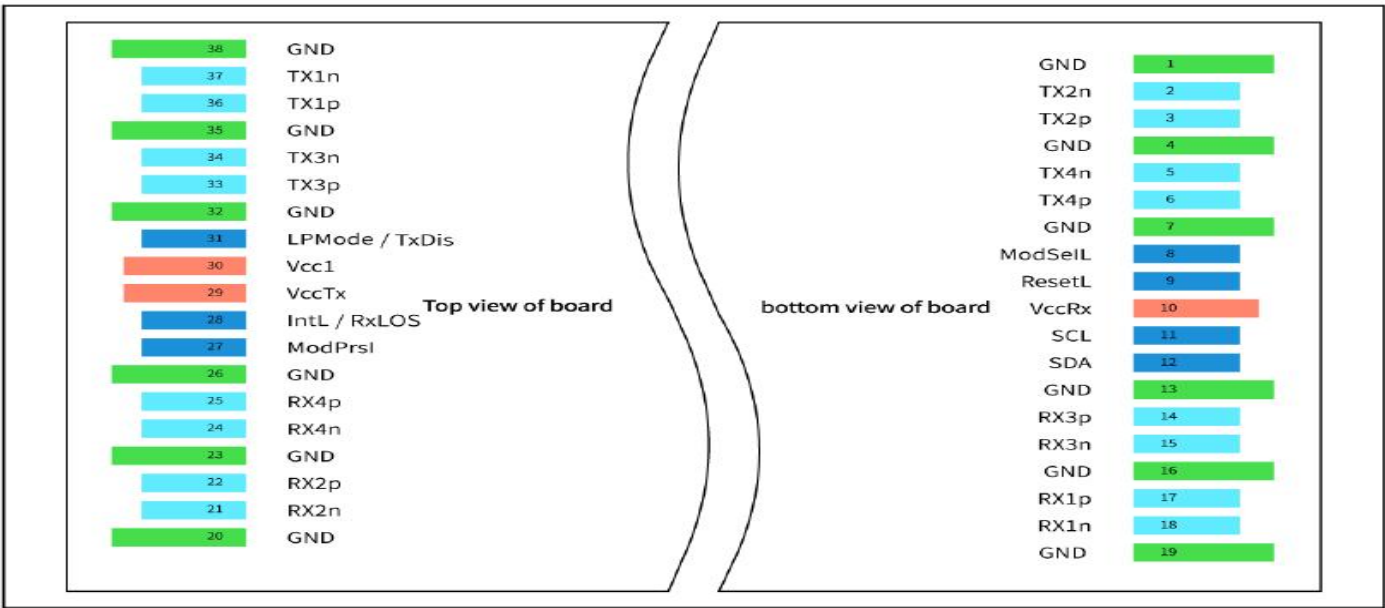

Wire connection diagram

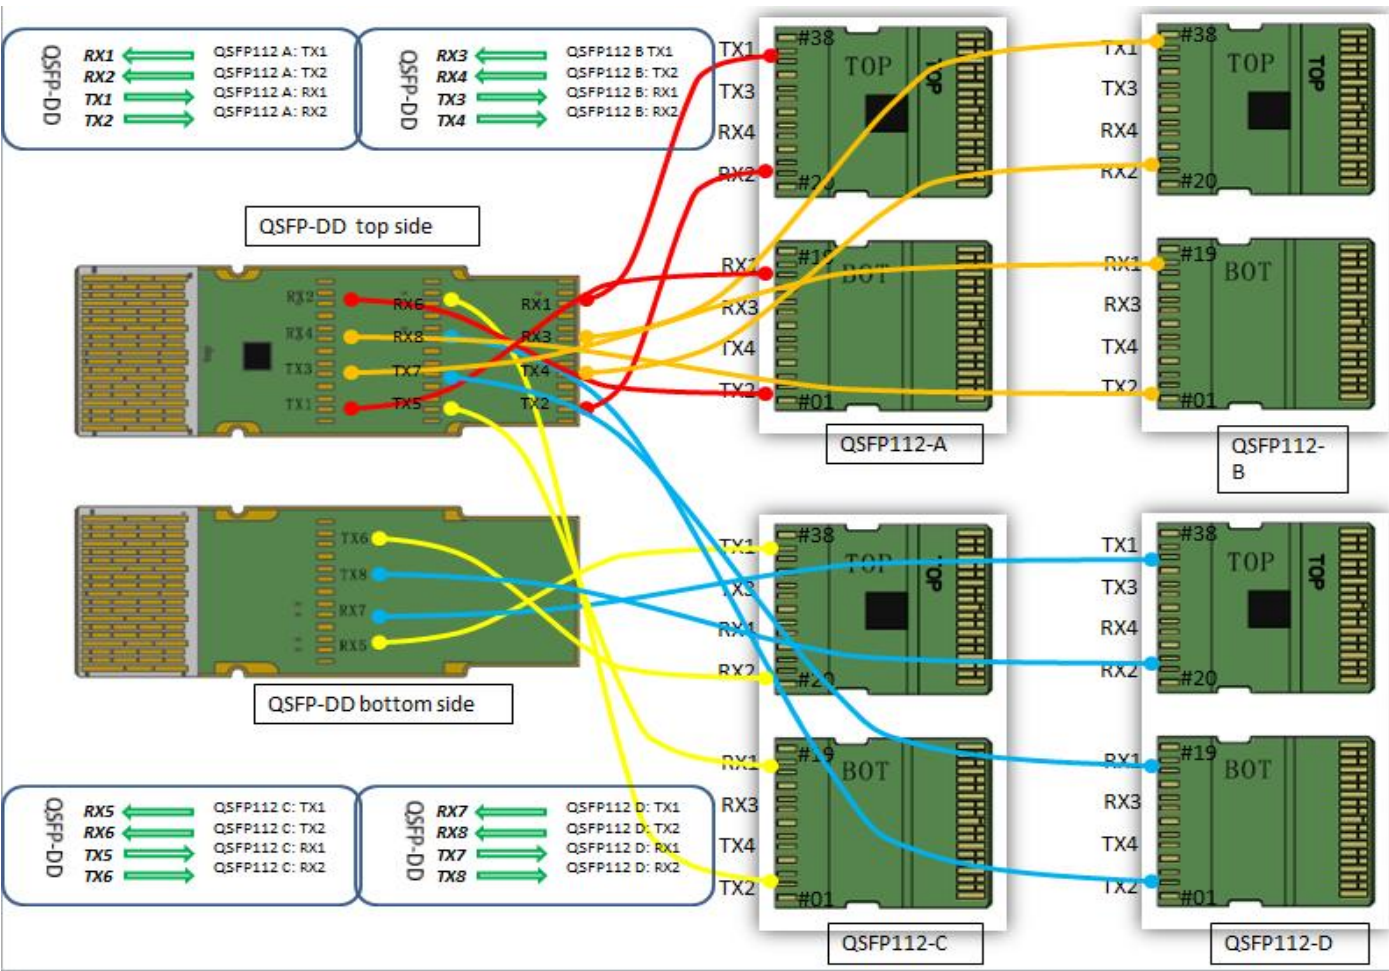

Ordering information

Part Number	FZL4J-800XXM05C
Length (meter)	2~5
Wire gauge (AWG)	AWG30/26

If length(meter) is decimal, PN should be as FZL4J-800XXM05C.,the wire gauge also can be customized. It's recommend to choose FIBERSTAMP's 800G PCC for less than 2m reach.

Important Notice

Performance figures, data and any illustrative material provided in this data sheet are typical and must be specifically confirmed in writing by FIBERSTAMP before they become applicable to any particular order or contract. In accordance with the FIBERSTAMP policy of continuous improvement specifications may change without notice.

The publication of information in this data sheet does not imply freedom from patent or other protective rights of FIBERSTAMP or others. Further details are available from any FIBERSTAMP sales representative.

E-mail: sales@fiberstamp.com

Official Site: www.fiberstamp.com

Revision History

Revision	Date	Description
Preliminary	Oct-11-2025	Advance Release.

