

800G QSFP-DD to 800G QSFP-DD Passive Direct Attach Cable Cables

FWL-800xxxxxC

Features

- Hot-plug QSFP-DD form factor
- Support 8x 50/100Gb/s PAM4 modulation
- Commercial case temperature range of 0°C to 70°C
- 26 AWG ~30 AWG support up to 1.8m length
- Contain EEPROM & programmable to customized

Applications

- Data storage and communication industry
- Switch / router / HBA
- Enterprise network
- Data Center Network
- SAN



STANDARDS COMPLIANCE

- IEEE P802.3ck D3.0
- QSFP-DD MSA HW Rev 6.01
- ROHS

Description

FIBERSTAMP's passive copper cable assembly series product provide superior signal integrity performance and reliability, QSFP-DD passive copper cable assembly doubles the number of 25G NRZ & 50G PAM4/lane from 4 to 8 lanes comparing QSFP cabling systems, double density still maintains backward plug compatibility to meet next generation market needs.

FIBERSTAMP's FWL-800xxxxxC cable assemblies are effective alternatives to fiber optics. The cable connects data signals from each of the 16 pairs on the single QSFP-DD end to the other QSFP-DD end, each pair operates at data rates of up to 100Gb/s, each QSFP-DD port can be addressed by EEPROM to provide product information, which can be read or write by I2C interface.

FIBERSTAMP's FWL-800xxxxxC cable assemblies is compliant with the QSFP-DD-MSA and IEEE802.3ck ,it's high performance & cost effective I/O solutions for LAN, HPC and SAN. The high speed cable assemblies meet and exceed 800Gigabit Ethernet, InfiniBand EDR /HDR and temperature requirements for performance and reliability.




Absolute Maximum Ratings

Parameter	Symbol	Min	Max	Unit
Storage Temperature	T _s	-20	85	°C
Case Operating Temperature	T _c	0	70	°C
Humidity (non-condensing)	Rh	5	95	%

Recommended Operating Conditions

Parameter	Symbol	Min	Typical	Max	Unit
Operating Case Temperature	T _c	0		70	°C
Baud Rate per Lane (PAM4)	fd		53.125		GBaud/s
Humidity	Rh	5		85	%

Mechanical Dimensions

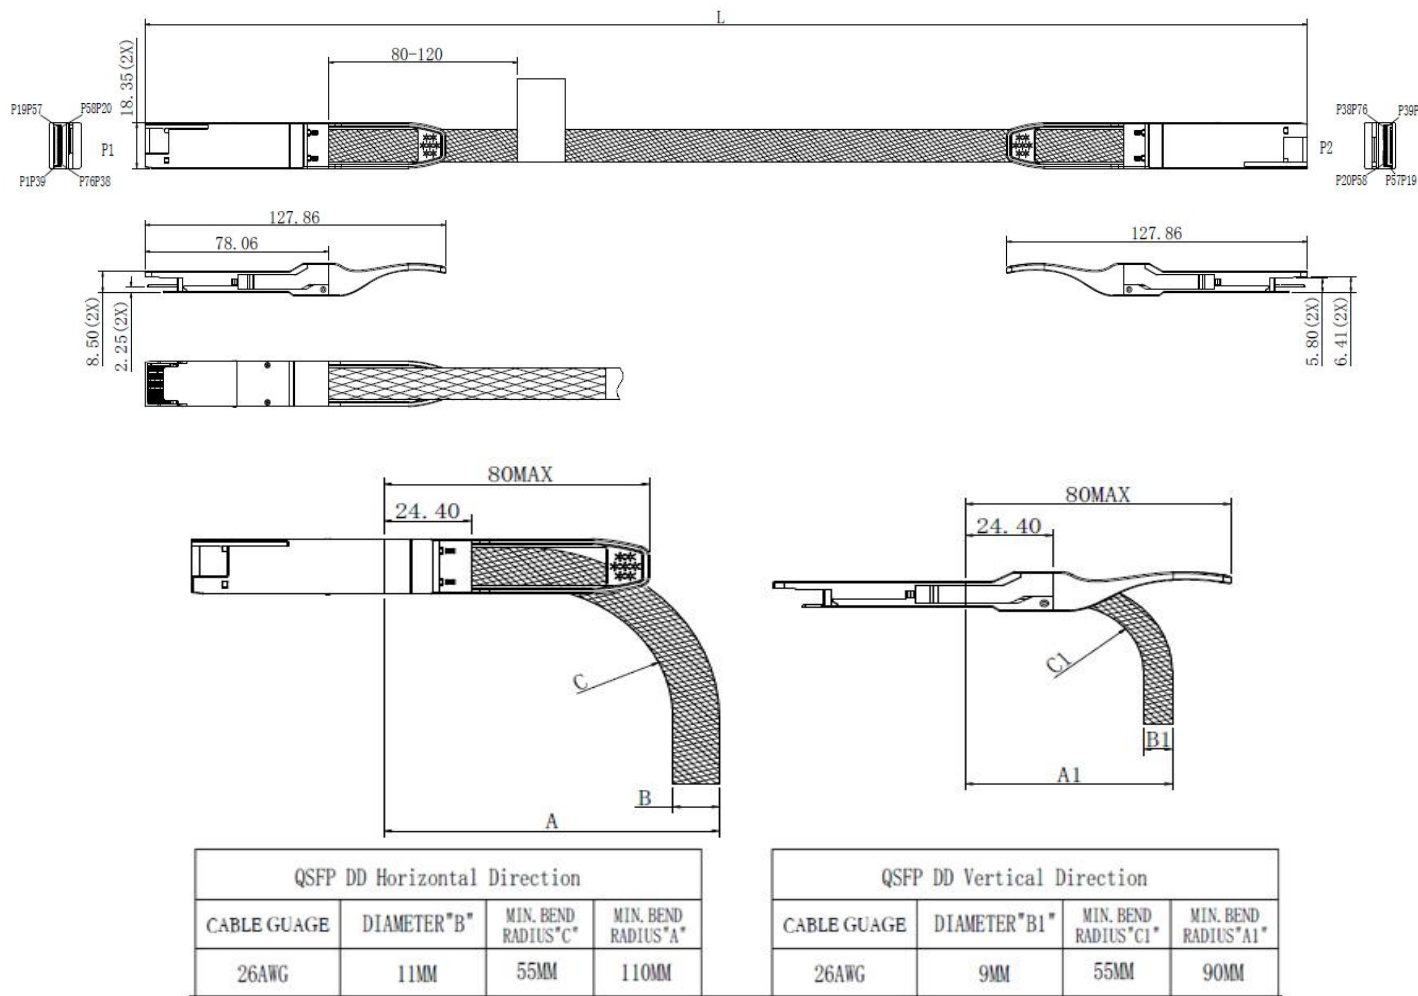

Ordering Information

Part Number	FWL-800xxxxxC		
Length (meter)	0.5	1	2
Wire gauge (AWG)	30	30	26

If length(meter) is decimal, PN should be as GQD-PC801-DXXC.

Important Notice

Performance figures, data and any illustrative material provided in this data sheet are typical and must be specifically confirmed in writing by FIBERSTAMP before they become applicable to any particular order or contract. In accordance with the FIBERSTAMP policy of continuous improvement specifications may change without notice.

The publication of information in this data sheet does not imply freedom from patent or other protective rights of FIBERSTAMP or others. Further details are available from any FIBERSTAMP sales representative.